



Ablum

- Arm
- Link
- Cup

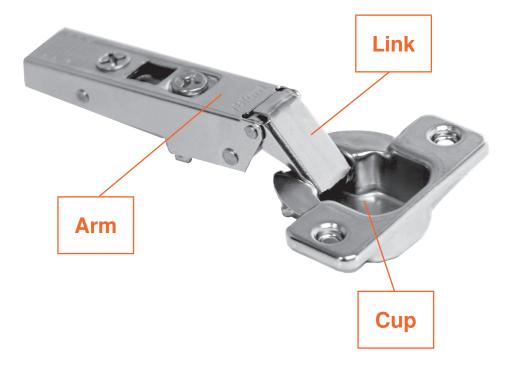

NOTE: All hinges shown are straight-arm hinges. The same characteristics apply to cranked hinge arms – with the exception of the shape/size of arm and different reference numbers.

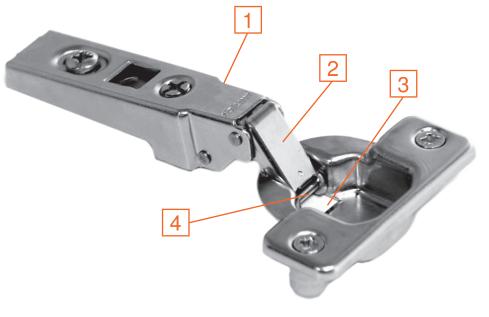

CLIP 100°


- 1 Stepped arm
- 2 Straight link
- 3 Large opening in cup
- 4 Exposed link rivet


Part no. **71M25X0**



- 1 Straight arm
- 2 Tapered link
- 3 Small closed cup
- 4 Covered link rivet

Part no. **75M15X0**

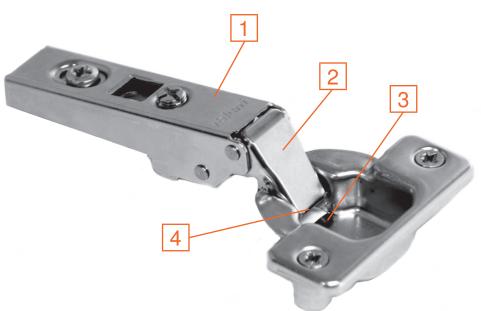

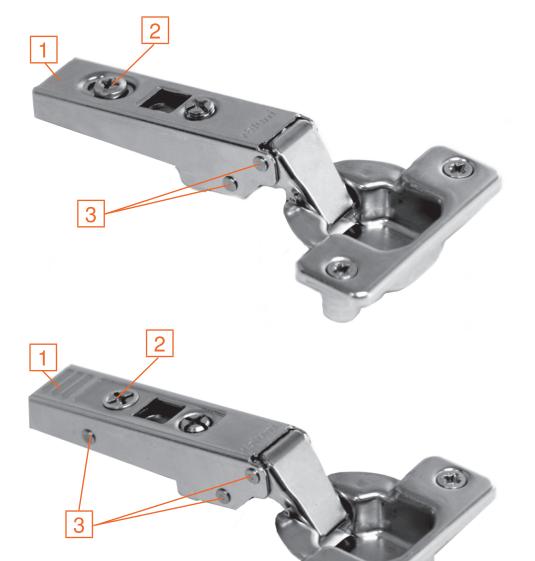

CLIP 107°

- 1 Smooth surface
- 2 Sliding depth adjustment screw
- 3 Two rivets

Part no. **75M15X0**

CLIP top 107°

- 1 Ribbed surface
- 2 "Spiral-tech" cam depth adjustment screw
- 3 Three rivets


Part no. **75T15X0**



CLIP top 107°

- 1 Standard side adjustment screw
- 2 Tapered link
- 3 Small opening in cup


Part no. **75T15X0**

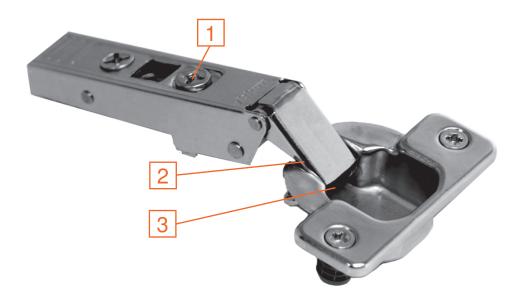

CLIP top 120°

- 1 Cam side adjustment screw
- 2 Slight rib on link
- 3 No opening in cup

Part no. **71T55X0**

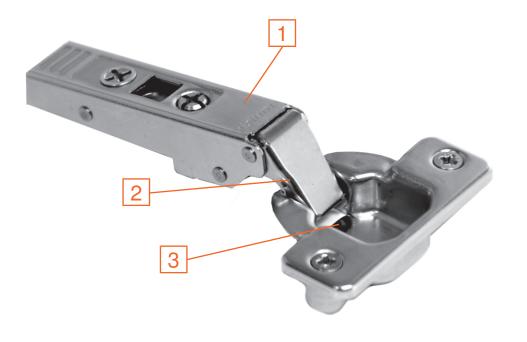

CLIP top 107°

- 1 Straight arm
- 2 Tapered link
- 3 Small opening in cup

Part no. **75T15X0**

CLIP top 95° Thick Door

- 1 Stepped arm
- 2 Raised line on arm
- 3 Exposed link rivet

Part no. **71T95X0**





CLIP top 120°

- 1 Straight arm
- 2 Ablum logo


Part no. **71T55X0**



CLIP top 120°+

- 1 Indented arm
- 2 b logo

Part no. **73T55X0**

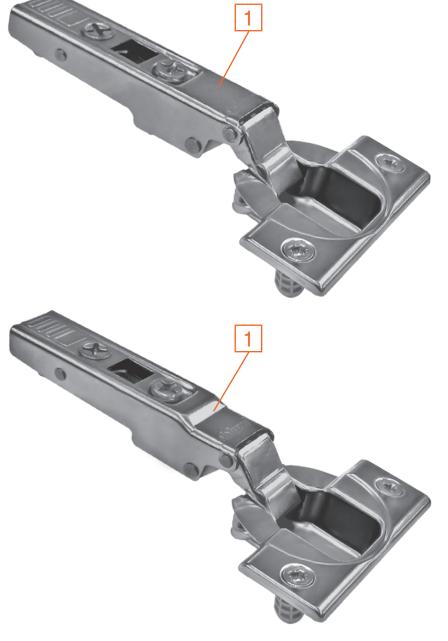

CLIP top 110°


1 Straight arm

Part no. **71T35X0**

CLIP top 110°+

1 Indented arm

Part no. **73T35X0**

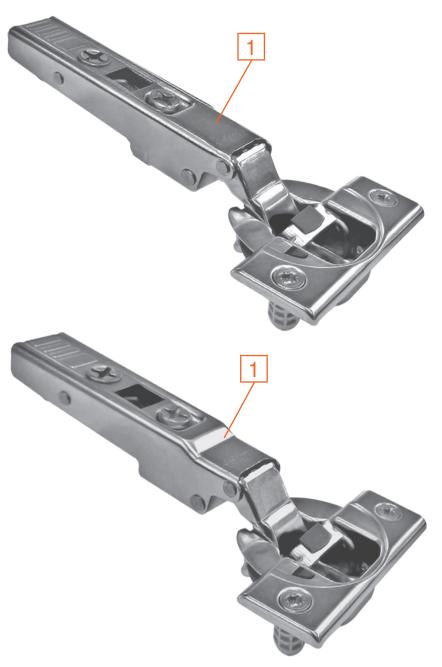

CLIP top BLUMOTION 110°

1 Straight arm


Part no. 71B35X0

CLIP top BLUMOTION 110°+

1 Indented arm

Part no. 73B35X0

ablum

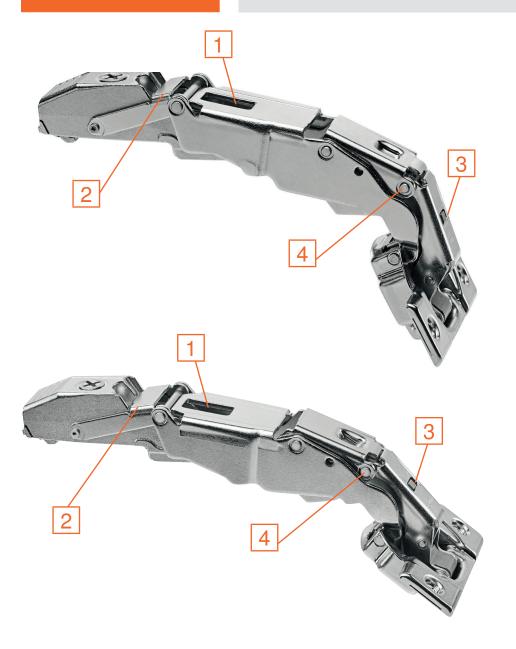

CLIP top BLUMOTION 155°


- 1 Rectangle cutout in arm
- 2 Narrow hinge link
- 3 BLUMOTION deactivation switch
- 4 Full exposed rivet

Part no. 71B75X0

CLIP top BLUMOTION 125°

- 1 Rectangle cutout in arm
- 2 Wide hinge link
- 3 BLUMOTION deactivation switch
- 4 Partial exposed rivet

Part no. 71B75X0D

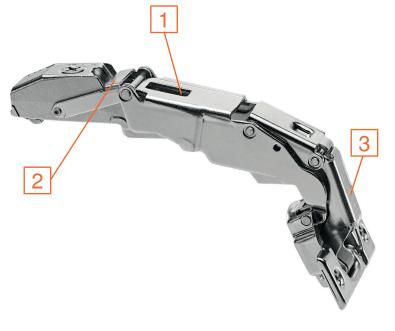

CLIP top 155°

- 1 Rectangle cutout in arm
- 2 Narrow hinge link
- 3 No BLUMOTION deactivation switch

Part no. **71T75X0**



- 1 T-cutout in arm
- 2 Adjustment screw recessed
- 3 Rear link inside
- 4 Round hole

Part no. **71T65X0**






Screw-on

- 1 No screws
- 2 No dowels

Part no. 71B3550

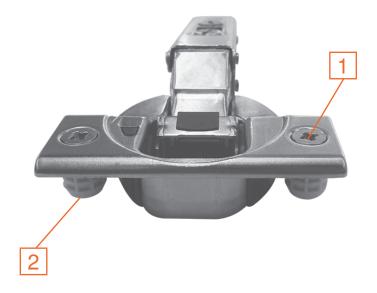

Press-in

- 1 Dowel screws
- 2 8 mm dowels

Part no. 71B3580



EXPANDO

- 1 EXPANDO screws
- 2 EXPANDO dowels

Part no. 71B358E




INSERTA


- 1 Die cast cover
- 2 8 mm INSERTA dowels

Part no. 71B3590

ablum°

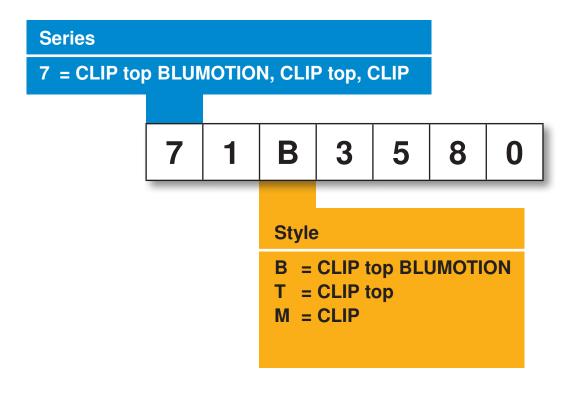


Ablum°

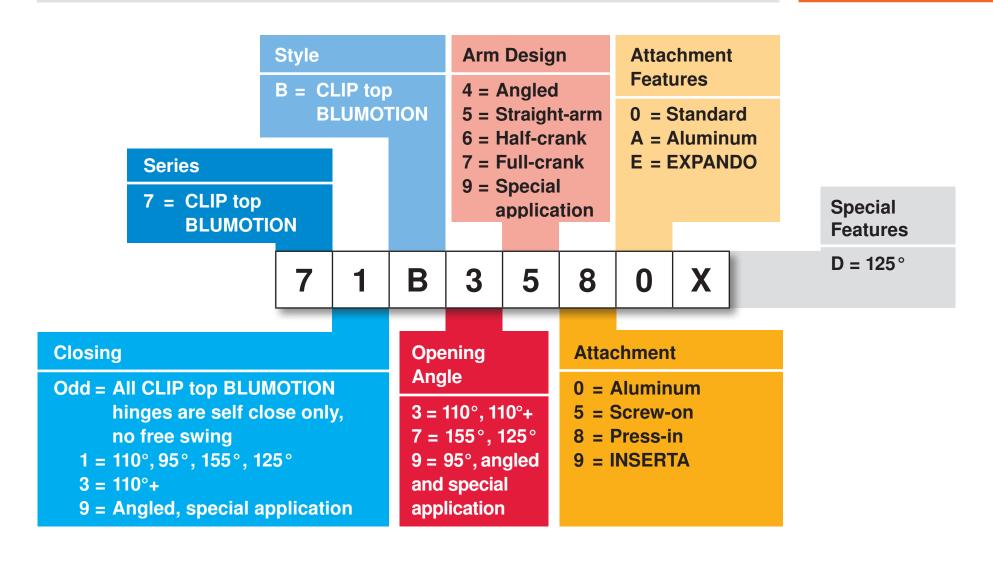


15

ablum°

Style				Arm Design		Attachment			
T = CLIP top A = Angled CLIP top Series 7 = CLIP top			4 = Angled 5 = Straight-arm 6 = Half-crank 7 = Full-crank 9 = Special application		Features 0 = Standard A = Aluminum E = EXPANDO		Special		
7 = CLIP top									Features
	7	1	Т	3	5	8	0	X	B = BLUMOTION compatible BT = Angled
Closing Even = Free swing Odd = Self close 0 or 1 = 110°, 120°, 170°, 95°, 155°, Mini 2 or 3 = 110°+, 120°+, Alt 4 or 5 = 107°, Glass 9 = Angled, special a	uminuı		Ang 0 = 1 = 3 = 4 = 5 = 6 = 7 = 8 =	ening gle Mini 107° 110° Glass 120° 170° 155° Bi-folo		0 = 9 3 = E 4 = 1 5 = 9 8 = F	Bi-fold	on for application press-in SERTA on	BLUMOTION compatible BTL = BLUMOTION compatible Free swing B37 = Inset blind corner D = 125° .TL = Free swing .10 = Blind corner

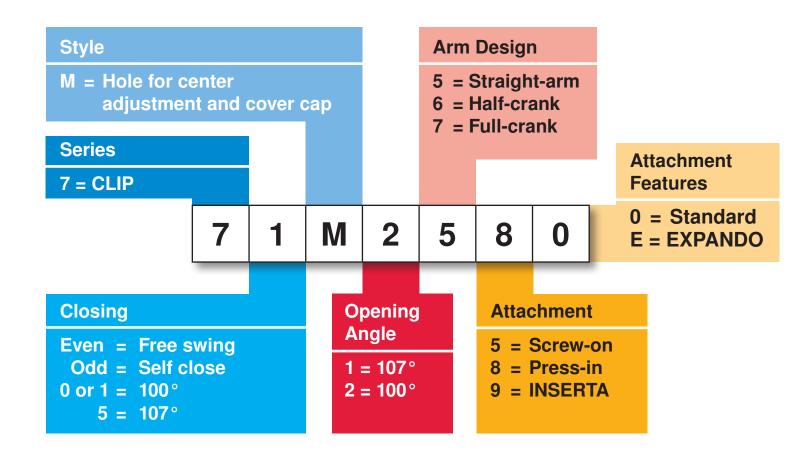



ablum°

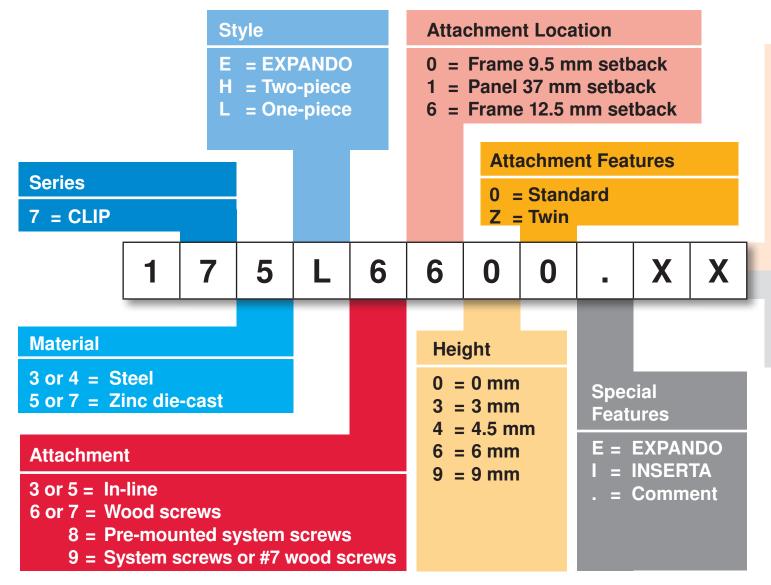


- .21 \ Face Frame/
- .22 Special
- .24 / Applications

- Cup
- Arm
- Mounting plate

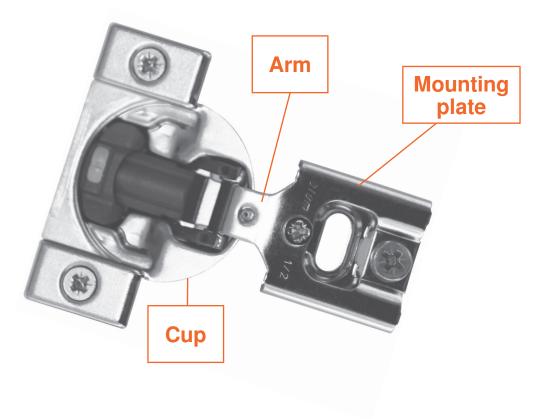

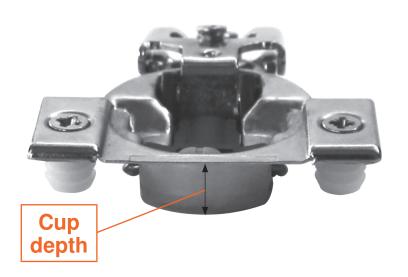


NOTE: All COMPACT hinges have the overlay stamped on the mounting plate



COMPACT BLUMOTION 39C - 110°

- 1 1/2" cup depth
- 2 Smooth arm

Part no. 39C35XB.XX




COMPACT BLUMOTION 38C - 107°

- 1 7/16" cup depth
- 2 Indented arm

Part no. 38C35XB.XX






COMPACT BLUMOTION 38N – 105°

- 1 Dimple in arm
- 2 Partial overlay plate (1 screw installation)


Part no. 38N35XB.XX



COMPACT BLUMOTION 38B - 107°

- 1 Indented arm
- 2 Face mount plate (2 screw installation)


Part no. 38B35XBF22





- 1 1/2" cup depth
- 2 39C stamped on base of cup

Part no. 39C35XC.XX



COMPACT 38C - 107°

- 1 7/16" cup depth
- 2 38C stamped on base of cup

Part no. 38C35XC.XX





COMPACT 38N - 105°

- 1 Side adjustment screw
- 2 Cam depth adjustment screw

Part no. 38N35XC.XX



COMPACT 38. – 105°

- 1 No side adjustment screw
- 2 No cam depth adjustment screw

Part no. 38.3580.08



Screw-on

- 1 No screws
- 2 No dowels

Part no. 38N355B.08




Press-in


- 1 Dowel screws
- 2 8 mm dowels


Part no. 38N358B.08



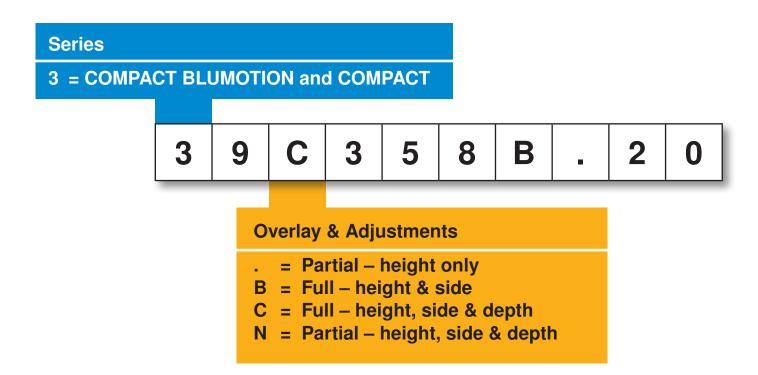

ablum°

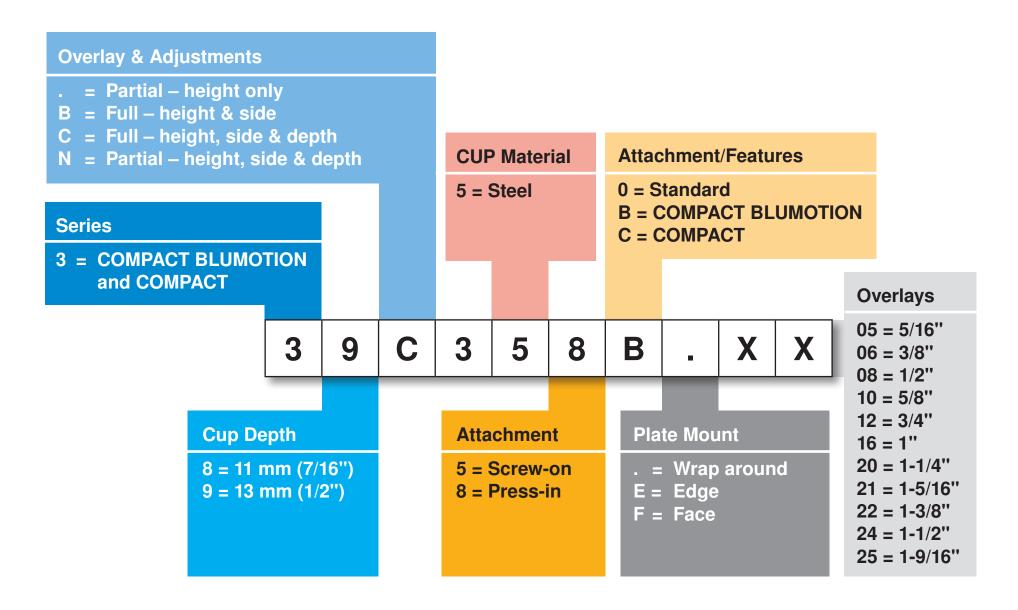

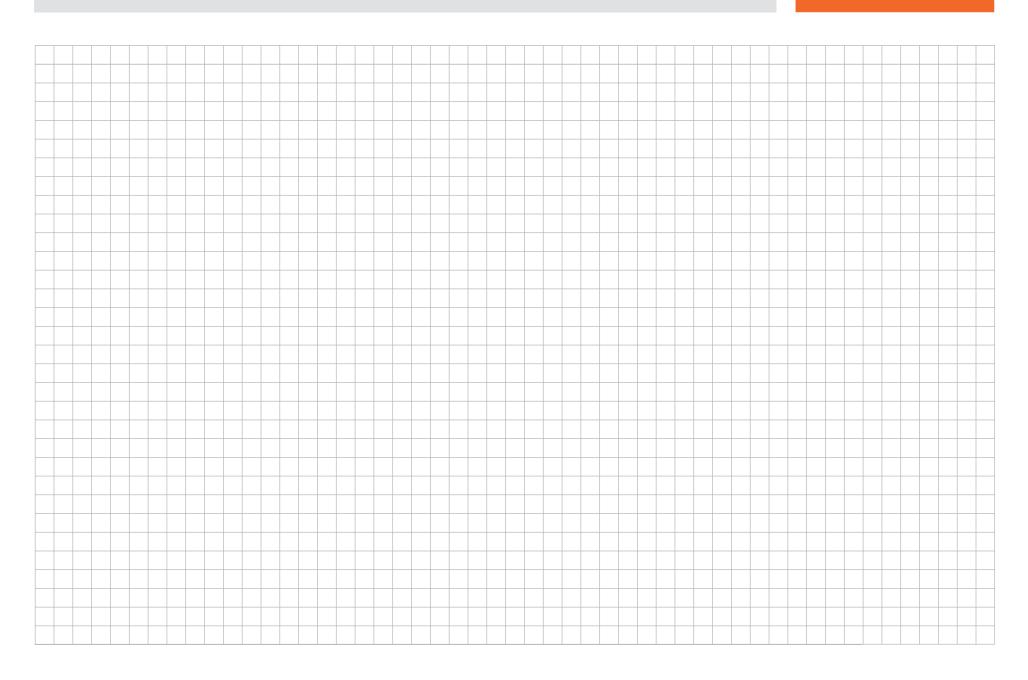


-	П		Δ
	ш	ч	C.
		_	

Notes

ıblum°



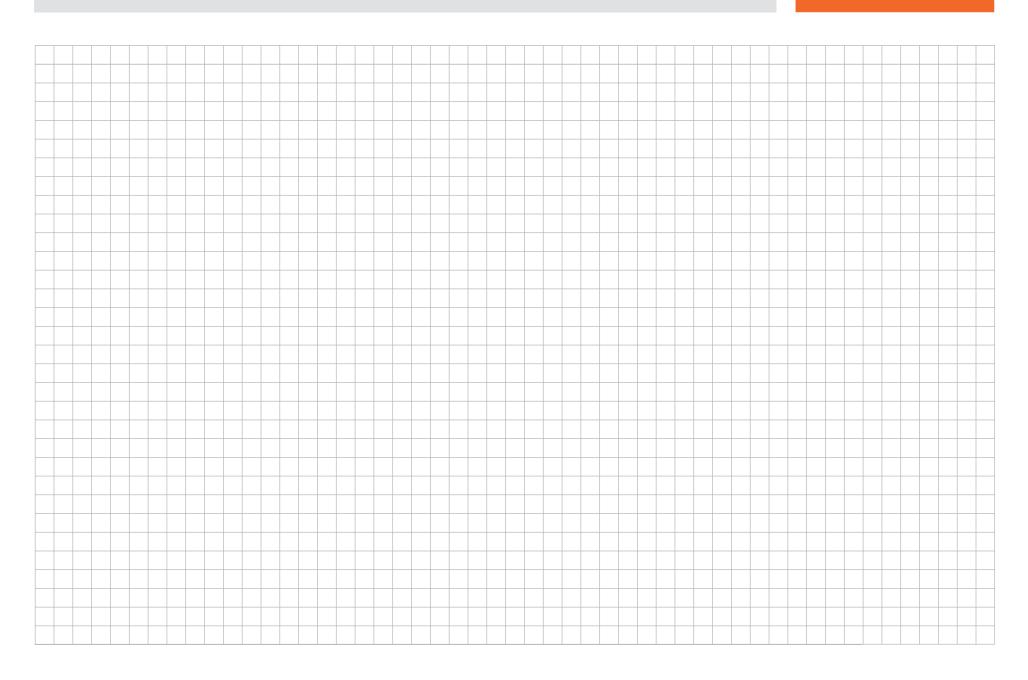

7733 Old Plank Rd. Stanley, NC 28164 800-438-6788 blum.com



